

Model 4040 LI

9 A max out • 90-264 VAC input

- 3-step charge control with current detection
- Universal input voltage 90-264 VAC
- 2-pin IEC 60320 C, 3-pin C6 on request
- Output terminal: cord w. open ends
- Wake up and low current start-up of deeply discharged batteries
- Safety indication and protection: against reverse polarity, short circuit, charging battery packs with the wrong number of cells and safety timer run-out
- Approvals:
 - Medically certified
 - Safety: EN 60601-1 ed. 3.2
 - Home healthcare EN 60601-1-11
 - EMC: EN 60601-1-2 ed. 4
 - UL approved
- Custom specifications on request:

Charging parameters, connectors, cords, logo print, housing/open frame/IP rating and certificates. For more information: [custom design info sheet](#)

Notes:

Desktop unit

Wall mount bracket available

With NTC input on request

2MOOP standard, 2MOPP available

Std. DC output cord:

Open ends, L 0.75m, AWG 14, Black PVC, UL 1185

Blueline



Available versions

3 cells / 9,0 A	4 cells / 7,0 A
5 cells / 5,6 A	6 cell / 4,65 A
7 cell / 4,0 A	8 cell / 3,5 A
9 cell / 3,1 A	10 cell / 2,8 A
11 cell / 2,54 A	12 cell / 2,33 A
13 cell / 2,15 A	14 cell / 2,0 A


MASCOT type 4040 Li-ion chargers:	3-cell Li-Ion	4-cell Li-Ion	5-cell Li-Ion
Input voltage: / Line frequency	90-264Vac 47-63Hz		
Active power factor correction:	Yes		
Max output power:	113.4W	117.6W	117.6W
Charge control: Charge indication:			
Step 0 < 10min Yellow (4 blinks)	CC 500mA ± 50mA, when battery voltage < 9V 0A / 0V	CC 500mA ± 50mA, when batt voltage < 12V 0A / 0V	CC 300mA ± 25mA, when battery voltage < 15V. 0A / 0V
Step 0 > 10min Red (5 blinks)	CC 9.0A ± 0.2A, when 9V < Vbat < 12.6V	CC 7.0A ± 0.2A, when 12V < Vbat < 16.8V	CC 5.6A ± 0.2A, when 15V < Vbat < 21.0V
Step 1 (Constant Current) Yellow	CV 12.6V ± 0.1V < 5.9A until I charge < 450mA or max. 1h	CV 16.8V ± 0.1V < 5.2A until I charge < 450mA or max. 1h	CV 21.0V ± 0.1V < 3.9A until I charge < 300mA or max. 1h.
Step 2 (Constant Voltage) Flashing Yellow			
Charge timer (step2, CV)	1h	1h	1h
Safety timer (all steps) Red (5 blinks)	72h	72h	72h
Step 3 (Charge Completed) Green	0A	0A	0A
Restart voltage	12.3V	16.4V	20.5V
Formation Charge (Step 0)	Low current start-up of deeply discharged battery.		
Wake-up of deeply discharged battery.	Yes, will apply voltage which deactivates deep discharge protection in battery pack.		
Indication when "Battery not connected"	Flashing Green (1s/1s)		
NTC input, on request (std is 10kohm, B-value approx. 4000)	0 – 45 °C: Normal charge. Battery temperature < 0 °C (too cold) or > 45°C (too hot): No charge, wait until temp. is OK.		
Ripple:	< 100mV p-p		
Efficiency (at 230V 100% load) approx.:	91 %		
Switch frequency approx.:	45-75kHz		
Leakage current from battery with mains switched off:	< 1 mA at nominal battery voltage (< 0.72 Ah/month)		
Protection:	Protected against reversed polarity. Error Indication: Red (2 blinks) Short circuit proof. Error Indication: Red (3 blinks) Charging of wrong lower voltage battery pack will be limited to 500mA (300mA at 5 cell) and terminated after 10min. Indication: Red (4 blinks) Safety timer. Error Indication: Red (5 blinks) No charge (or charge terminated) if connecting wrong battery pack with higher voltage. Indication: LED is OFF.		
Temperature range:	Operating: -25 to +40°C. Transport and short time storage: -25 to +85°C		
Derating at 40°C approx.:	6.6A	5.5A	4.1A
Safety:	Medical EN 60601-1 / Home Health care EN 60601-1-11/ Battery Charger EN 60335-2-29. A/V and Comm. tech: IEC 62368-1		
Insulation class :	Class II. (Class I on request)		
Insulation voltage: Primary – secondary:	4000VAC / 5700VDC		
EMC standards:	EN 55014-1 and –2, Emission EN 61000-6-3, Immunity EN 61000-6-1, EN 60601-1-2.		
Input terminal:	2-pins IEC 320 connector, C8 or mains cable (3pins IEC 320 connector, C6 on request)		
Output terminals:	DC connector, Battery clips. Push-on terminals or open ends.		
IP-Grade:	41		
Rec. battery capacity:	9-360Ah	7-280Ah	5.6- 224Ah
Dimensions:	203.5 × 87 × 43.5 mm		
Weight:	590g		

MASCOT type 4040 Li-ion chargers:	6-cell Li-Ion	7-cell Li-Ion	8-cell Li-Ion
Input voltage: / Line frequency	90-264Vac 47-63Hz		
Active power factor correction:	Yes		
Max output power:	117.2W	117.6W	117.6W
Charge control: Charge indication.			
Step 0 < 10min Yellow	CC 300mA ± 25mA, when batt voltage < 18V.	CC 300mA ± 25mA, when batt voltage < 21V.	CC 300mA ± 25mA, when batt voltage < 24V.
Step 0 > 10min Red (4 blinks)	0A / 0V	0A / 0V	0A / 0V
Step 1 (Constant Current) Yellow	CC 4.65A ± 0.2A, when 18V < Vbat < 25.2V	CC 4.0A ± 0.2A, when 21V < Vbat < 29.4V	CC 3.5A ± 0.2A, when 24V < Vbat < 33.6V
Step 2 (Constant Voltage) Flashing Yellow	CV 25.2V ± 0.2V < 3.2A until I charge < 270mA or max. 1h.	CV 29.4V ± 0.2V < 2.8A until I charge < 270mA or max. 1h	CV 33.6V ± 0.2V < 2.5A until I charge < 270mA or max. 1h.
Charge timer (step2, CV)	1h	1h	1h
Safety timer (all steps) Red (5 blinks)	72h	72h	72h
Step 3 (Charge Completed) Green	0A	0A	0A
Restart voltage	24.6V	28.7V	32.8V
Formation Charge (Step 0)	Low current start-up of deeply discharged battery.		
Wake-up of deeply discharged battery.	Yes, will apply voltage which deactivates deep discharge protection in battery pack.		
Indication when "Battery not connected"	Flashing Green (1s/1s)		
NTC input, on request (std is 10kohm, B-value approx. 4000)	0 – 45 °C: Normal charge. Battery temperature < 0 °C (too cold) or > 45°C (too hot): No charge, wait until temp. is OK.		
Ripple:	< 100mV p-p		
Efficiency (at 100% load) approx.:	91 %		
Switch frequency approx.:	45-75KHz		
Leakage current from battery with mains switched off:	< 1.0 mA at nominal battery voltage (< 0.72 Ah/month)		
Protection:	Protected against reversed polarity. Error Indication: Red (2 blinks) Short circuit proof. Error Indication: Red (3 blinks) Charging of wrong lower voltage battery pack will be limited to 300mA and terminated after 10min. Indication: Red (4 blinks) Safety timer. Error Indication: Red (5 blinks) No charge (or charge terminated) if connecting wrong battery pack with higher voltage. Indication: LED is OFF.		
Temperature range:	Operating: -25 to +40°C. Transport and short time storage: -25 to +85°C		
Derating at 40°C approx.:	3.8A	3.1A	2.5A
Safety:	Medical EN 60601-1 / Home Health care EN 60601-1-11/ Battery Charger EN 60335-2-29. A/V and Comm. tech: IEC 62368-1		
Insulation class :	Class II (Class I on request)		
Insulation voltage: Primary – secondary:	4000VAC / 5700VDC		
EMC standards:	EN 55014-1 and -2, Emission EN 61000-6-3, Immunity EN 61000-6-1, EN 60601-1-2		
Input terminal:	2-pins IEC 320 connector, C8. (3pins IEC 320 connector, C6 on request)		
Output terminals:	DC connector, Battery clips. Push-on terminals or open ends.		
IP-Grade:	41		
Rec. battery capacity:	4.65 -186Ah	4.0 -160Ah	3.5-140Ah
Dimensions:	203.5 × 87 × 43.5 mm		
Weight:	590g		

MASCOT type 4040 Li-ion chargers:	9-cell Li-Ion	10-cell Li-Ion	11-cell Li-Ion
Input voltage: / Line frequency	90-264Vac 47-63Hz		
Active power factor correction:	Yes		
Max output power	117.2W	117.4W	117.4W
Charge control: Charge indication:			
Step 0 < 10min Yellow	CC 200mA ± 25mA, when batt voltage < 27V.	CC 200mA ± 25mA, when batt voltage < 30V.	CC 200mA ± 25mA, when batt voltage < 33V.
Step 0 > 10min Red (4 blinks)	0A / 0V	0A / 0V	0A / 0V
Step 1 (Constant Current) Yellow	CC 3.1A ± 0.2A, when 27V < Vbat < 37.8V	CC 2.8A ± 0.2A, when 30V < Vbat < 42V	CC 2.54A ± 0.2A, when 33V < Vbat < 46.2V
Step 2 (Constant Voltage) Flashing Yellow	CV 37.8V ± 0.2V < 2.2A until I charge < 200mA or max. 1h	CV 42.0V ± 0.2V < 1.7A until I charge < 200mA or max. 1h	CV 46.2V ± 0.3V < 1.5A until I charge < 200mA or max. 1h.
Charge timer (step2, CV)	1h	1h	1h
Safety timer (all steps) Red (5 blinks)	72h	72h	72h
Step 3 (Charge Completed) Green	0A	0A	0A
Restart voltage	36.9V	41V	45.1V
Formation Charge (Step 0)	Low current start-up of deeply discharged battery.		
Wake-up of deeply discharged battery.	Yes, will apply voltage which deactivates deep discharge protection in battery pack.		
Indication when "Battery not connected"	Flashing Green (1s/1s)		
NTC input, on request (std is 10kohm, B-value approx. 4000)	0 - 45 °C: Normal charge. Battery temperature < 0 °C (too cold) or > 45°C (too hot): No charge, wait until temp. is OK.		
Ripple:	< 100mV p-p		
Efficiency (at 100% load) approx.:	91 %		
Switch frequency approx.:	45-75kHz		
Leakage current from battery with mains switched off:	< 1.0 mA at nominal battery voltage (< 0.72 Ah/month)		
Protection:	Protected against reversed polarity. Error Indication: Red (2 blinks) Short circuit proof. Error Indication: Red (3 blinks) Charging of wrong lower voltage battery pack will be limited to 200mA and terminated after 10min. Indication: Red (4 blinks) Safety timer. Error Indication: Red (5 blinks) No charge (or charge terminated) if connecting wrong battery pack with higher voltage. Indication: LED is OFF.		
Temperature range:	Operating: -25 to +40°C. Transport and short time storage: -25 to +85°C		
Derating at 40°C approx.:	2.5A	1.8A	1.5A
Safety:	Medical EN 60601-1 / Home Health care EN 60601-1-11/ Battery Charger EN 60335-2-29. A/V and Comm. tech: IEC 62368-1		
Insulation class :	Class II (Class I on request)		
Insulation voltage: Primary – secondary:	4000VAC / 5700VDC		
EMC standards:	EN 55014-1 and -2, Emission EN 61000-6-3, Immunity EN 61000-6-1, EN 60601-1-2		
Input terminal:	2-pins IEC 320 connector, C8. (3pins IEC 320 connector, C6 on request)		
Output terminals:	DC connector, Battery clips. Push-on terminals or open ends.		
IP-Grade:	41		
Rec. battery capacity:	3.1 - 124Ah	2.8 -112Ah	2.54 -101Ah
Dimensions:	203.5 × 87 × 43.5 mm		
Weight:	590g		

MASCOT type 4040 Li-Ion chargers:	12-cell Li-Ion	13-cell Li-Ion	14-cell Li-Ion
Input voltage: / Line frequency	90-264Vac 47-63Hz		
Active power factor correction:	Yes		
Max output power	117.5W	117.4W	
Charge control: Charge indication:			
Step 0 < 10min Yellow	CC 200mA ± 25mA, when batt voltage < 36V. 0A / 0V	CC 200mA ± 25mA, when batt voltage < 39V. 0A / 0V	CC 200mA ± 25mA, when batt voltage < 42V. 0A / 0V
Step 0 > 10min Red (4 blinks)	CC 2.33A ± 0.2A, when 36V < Vbat < 50.4V	CC 2.15A ± 0.2A, when 39V < Vbat < 54.6V	CC 2.0A ± 0.2A, when 42V < Vbat < 58.8V
Step 1 (Constant Current) Yellow	CV 50.4V ± 0.3V < 1.6A until I charge < 200mA or max. 1h.	CV 54.6V ± 0.3V < 1.5A until I charge < 200mA or max. 1h.	CV 58.8V ± 0.3V < 1.3A until I charge < 200mA or max. 1h.
Step 2 (Constant Voltage) Flashing Yellow	1h	1h	1h
Charge timer (step2, CV)	72h	72h	72h
Safety timer (all steps) Red (5 blinks)	0A	0A	0A
Step 3 (Charge Completed) Green	49.2V	53.3V	57.4V
Restart voltage	Low current start-up of deeply discharged battery.		
Formation Charge (Step 0)	Yes, will apply voltage which deactivates deep discharge protection in battery pack		
Wake-up of deeply discharged battery	Flashing Green (1s/1s)		
Indication when "Battery not connected"	0 - 45 °C: Normal charge. Battery temperature < 0 °C (too cold) or > 45°C (too hot): No charge, wait until temp. is OK.		
NTC input, on request (std is 10kohm, B-value approx. 4000)	< 100mV p-p		
Ripple:	91 %		
Efficiency (at 100% load) approx.:	45-75kHz		
Switch frequency approx.:	< 1.0 mA at nominal battery voltage (< 0.72 Ah/month)		
Leakage current from battery with mains switched off:	Protected against reversed polarity. Error Indication: Red (2 blinks) Short circuit proof. Error Indication: Red (3 blinks) Charging of wrong lower voltage battery pack will be limited to 200mA and terminated after 10min. Indication: Red (4 blinks) Safety timer. Error Indication: Red (5 blinks) No charge (or charge terminated) if connecting wrong battery pack with higher voltage. Indication: LED is OFF.		
Protection:	Operating: -25 to +40°C. Transport and short time storage: -25 to +85°C		
Temperature range:	1.7A	1.4A	1.3A
Derating at 40°C approx.:	Medical EN 60601-1 / Home Health care EN 60601-1-11/ Battery Charger EN 60335-2-29. AVV and Comm. tech: IEC 62368-1		
Safety:	Class II (Class I on request)		
Insulation class:	4000VAC / 5700VDC		
Insulation voltage: Primary – secondary:	EN 55014-1 and -2, Emission EN 61000-6-3, Immunity EN 61000-6-1, EN 60601-1-2		
EMC standards:	2-pins IEC 320 connector, C8. (3pins IEC 320 connector, C6 on request)		
Input terminal:	DC connector, Battery clips, Push-on terminals or open ends.		
Output terminals:	41		
IP-Grade:	2.33 – 93Ah	2.15 - 86Ah	2 - 80Ah
Rec. battery capacity:	203.5 x 87 x 43.5 mm		
Dimensions:	590g		
Weight:			

Technical drawing

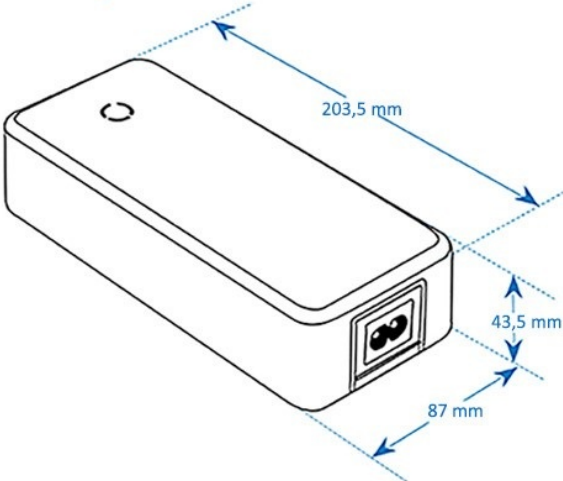

EU & UK Declaration of Conformity



We, the responsible manufacturer;

Company Name: **Mascot Electronics AS**
 Postal Address: **P.O.Box 177, N-1601 Fredrikstad, NORWAY**
 Visiting Address: **Mosseveien 109, N-1624 Gressvik, NORWAY**
 Telephone: **(+47) 69 36 43 00** E-mail: **sales@mascot.com** WEB: **www.mascot.com**

declare that this Declaration is issued under our sole responsibility and belongs to the following product(s):

Product and intended purpose: **Battery Charger for Li-Ion-, LiFePO₄-, Li-Titanate-, NiMH/NiCd- or Lead-Acid Batteries**

Brand(s): **and/or  MASCOT** (may also carry additional customer name, logo or trade mark)

Type(s)/Model(s)/UDI-DI:	4040	2xMOOP to IEC 60601-1, rated input voltage 100- 240 V, 50- 60 Hz
	4040V	2xMOOP to IEC 60601-1, rated input voltage 100- 240 V 50 Hz/ 100- 220 V 60 Hz
	4040P	2xMOPP to IEC 60601-1, rated input voltage 100- 240 V, 50- 60 Hz
	4040VP	2xMOPP to IEC 60601-1, rated input voltage 100- 240 V 50 Hz/ 100- 220 V 60 Hz
	4040B	2xMOOP to IEC 60601-1, PWB-only, for building-in, rated input voltage 100 - 240 V, 50 - 60 Hz
	4040VB	2xMOOP to IEC 60601-1, PWB-only, for building-in, rated input voltage 100 - 240 V 50 Hz/ 100 - 220 V 60 Hz
	4040BP	2xMOPP to IEC 60601-1, PWB-only, for building-in, rated input voltage 100 - 240 V, 50 - 60 Hz
	4040VBP	2xMOPP to IEC 60601-1, PWB-only, for building-in, rated input voltage 100 - 240 V 50 Hz/ 100 - 220 V 60 Hz

(all models may also carry additional customer model name or part number)

Batch / Serial No./ UDI-PI: **all CE- and/or UKCA- marked products produced from the date indicated below**
 (for production date: see marking on the product)

Description: **Input: max. 1.6 A 100-240 VAC 50-60 Hz, Class I or Class II**
Output:
 versions for Lead-Acid Batteries 6 - 48 V:
 6 V max. 10.0 A 12 V max. 8.0 A 18 V max. 5.3 A 24 V max. 4.0 A 36 V max. 2.66 A
 48 V max. 2.0 A
 versions for Li-Ion Batteries 1 - 14 cell:
 1 cell max. 10.0 A 2 cell max. 10.0 A 3 cell max. 9.0 A 4 cell max. 7.0 A 5 cell max. 5.6 A
 6 cell max. 4.65 A 7 cell max. 4.0 A 8 cell max. 3.5 A 9 cell max. 3.1 A 10 cell max. 2.8 A
 11 cell max. 2.54 A 12 cell max. 2.33 A 13 cell max. 2.15 A 14 cell max. 2.0 A
 versions for LiFePO₄ Batteries 1 - 16 cell:
 1 cell max. 10.0 A 2 cell max. 10.0 A 3 cell max. 10.0 A 4 cell max. 8.0 A 5 cell max. 6.4 A
 6 cell max. 5.3 A 7 cell max. 4.6 A 8 cell max. 4.0 A 9 cell max. 3.5 A 10 cell max. 3.2 A
 11 cell max. 2.92 A 12 cell max. 2.68 A 13 cell max. 2.47 A 14 cell max. 2.3 A 15 cell max. 2.15 A
 16 cell max. 2.0 A
 versions for Li-Titanate Batteries 1 - 20 cell:
 1 cell max. 10.0 A 2 cell max. 10.0 A 3 cell max. 10.0 A 4 cell max. 10.0 A 5 cell max. 8.2 A
 6 cell max. 6.8 A 7 cell max. 5.9 A 8 cell max. 5.1 A 9 cell max. 4.5 A 10 cell max. 4.1 A
 11 cell max. 3.7 A 12 cell max. 3.4 A 13 cell max. 3.17 A 14 cell max. 2.94 A 15 cell max. 2.75 A
 16 cell max. 2.57 A 17 cell max. 2.42 A 18 cell max. 2.29 A 19 cell max. 2.17 A 20 cell max. 2.00 A
 versions for NiMH/NiCd Batteries:
 2 cell max. 10.0 A 3-6 cell max. 10.0 A 4-8 cell max. 8.0 A 5-10 cell max. 6.5 A 6-12 cell max. 5.4 A
 10-20 cell max. 3.2 A 10-22 cell max. 2.9 A 15-30 cell max. 2.18 A 20-40 cell max. 1.96 A

NOTES:
 - For compliance with EN 60601-1 output terminals >60 VDC must be inaccessible to operator and may not be interconnected.

EU & UK Declaration of Conformity



The product(s) described above are in conformity with the relevant European Union harmonisation legislation for CE-marking:

2014/30/EU	EU Directive - Electromagnetic Compatibility (EMC) recast, repealing Directives 2004/108/EC & 89/336/EEC
(EU) 2017/745	EU Regulation - Medical Devices Regulation (MDR), Risk Class I Device repealing directive 93/42/EEC
2009/125/EC	EU Directive - Energy Related Products, Ecodesign (ERP) recast, repealing Directive 2005/32/EC (EUP)
2015/863/EU	EU Directive - Restriction on use of Hazardous Substances in EEE ("RoHS3") recast, repealing Directives 2002/95/EC, 2008/35/EC & 2011/65/EU

The product(s) described above are in conformity with the relevant U.K. legislation for UKCA-marking:

Electrical Equipment (Safety) Regulations 2016

Electromagnetic Compatibility (EMC) Regulations 2016

The Medical Devices (Amendment etc.) (EU Exit) Regulations 2020, Risk Class I Device

Ecodesign for Energy-Related Products (External Power Supplies) Regulations 2020

Draft Regulation, awaiting implementation

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

The following harmonised standards and/or technical specifications have been applied:

(International editions and comments indicated in brackets):

Electrical Safety and Electromagnetic Compatibility (to MDR-Directives):

EN 60601-1	EN 60601-1:2006 + /AC:2010 +/A1:2013/A2:2021 (IEC 60601-1:2005 + /A1:2012/A2:2020)	Medical electrical equipment, Edition 3.2 (Also tested according to edition 3.1)
EN 60601-1-2	EN 60601-1-2:2015 (IEC 60601-1-2:2014, Edition 4.0)	Medical equipment, EMC - Requirements and tests, Edition 4.0
EN 60601-1-11	EN 60601-1-11:2015 (IEC 60601-1-2:2015/A1:2020, Edition 2.1)	Medical equipment, Home Healthcare, Edition 2.0

Electromagnetic Compatibility (to EMC-Directive):

EN 61000-6-1	EN 61000-6-1:2007 (IEC 61000-6-1:2005, Edition 2.0) (also IEC 61000-6-1:2016, Edition 3.0, not yet an EN-norm)	Immunity-residential, comm. & light-industrial environment, Edition 2.0
EN 61000-6-3	EN 61000-6-3:2007 + /A1:2011 & /AC:2012 (IEC 61000-6-3:2007 + /A1:2010)	Emission-residential, comm. & light-industrial environment, Edition 2.1

Ecodesign to EU ERP-Directive:

Commission Regulation (EC) No 2019/1782	implementing Directive 2009/125/EC with regard to ecodesign requirements for no-load condition electric power consumption and average active efficiency of external power supplies (Note: not applicable to Battery Chargers, ref. Article 1.2 item c)
---	---

Ecodesign for U.K.:

Draft Regulation only (awaiting implementation)	Draft "Ecodesign for Energy-Related Products (External Power Supplies) Regulations 2020" (Note: not applicable to Battery Chargers)
---	---

Ecodesign for U.S.A. (Note: depends on battery used !):

US Code of Federal Regulations (CFR) Also called "DoE compliance"	10 CFR Part 430 - Energy Conservation Program for Consumer Products, 10 CFR Part 430, Subpart B - Test Procedures, 10 CFR Appendix Y to Subpart B of Part 430, Uniform Test Method for Measuring the Energy Consumption of Battery Chargers or 10 CFR Appendix Z to Subpart B of Part 430, Uniform Test Method for Measuring the Energy Consumption of External Power Supplies, whichever applicable.
--	---

California Code of Regulations (CCR) Also called "CEC-400 compliance" referring to CEC-400-2017-002 "2016 Appliance Efficiency Regulations" issued by California Energy Commission	CCR Title 20 - Public Utilities and Energy, Division 2 - State Energy Resources Conservation and Development Commission, Chapter 4 - Energy Conservation, Article 4 - Appliance Efficiency Regulations, Sections 1601 to 1609
---	--

Restriction of the Use of certain Hazardous Substances (RoHS) for EU:

2015/863/EU "RoHS3"	EU Directive - Restriction on use of Hazardous Substances in EEE Restriction of the Use of certain Hazardous Substances in Electrical and Electronic Equipment
---------------------	--

Restriction of the Use of certain Hazardous Substances for UK:

The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012
--

EU & UK Declaration of Conformity



Additional Information:

Compliance with harmonised standards and technical specifications may have been verified by the manufacturer, by third party testing or by a Certification Body (NCB).

The products are considered Risk Class I devices according to EU Medical Devices Directive, EU Medical Devices Regulation and the U.K. Medical Devices (Amendment etc.) (EU Exit) Regulations 2020.

The product(s) may be produced at production sites (for specific product: see "Made in"-marking on the product):

- Mascot Baltic OÜ, Taevakivi 15, EE-13619 Tallinn, ESTONIA
- Mascot Power Supplies (Ningbo) Co.,Ltd, No.128 Jinchuan Road, Zhenhai, Ningbo 315221, CHINA

The production sites are certified to standard EN 29001:2015 (ISO 9001:2015) by:

- Mascot Baltic OÜ: Metrosert, certificate ref. K-144
- Mascot Power Supplies (Ningbo) Co.,Ltd: DNV-GL, certificate ref. 179027-2015

The most recent issue of this Declaration is available at www.mascot.com.

Fredrikstad, Norway

Place of issue

2023-06-16

Date of issue

Signed on behalf of Mascot Electronics AS

Fredrik Johansen, Compliance Manager

Name, function, signature